GRIP PRESSURE AS A MEASURE OF TASK DIFFICULTY IN COMPENSATORY TRACKING TASKS

John Howard Hickok

Library
Naval Postgraduate School
Monterey, California 93940

NAVAL POSTGRADUATE SCHOOL
Monterey, California

THESIS

GRIP PRESSURE
AS A MEASURE OF TASK DIFFICULTY
IN COMPENSATORY TRACKING TASKS

by

John Howard Hickok

Thesis Advisor: R. A. Hess

September 1973

T156965

Approved for public release; distribution unlimited.

Grip Pressure as a Measure of Task Difficulty in Compensatory Tracking Tasks

by

John Howard Hickok
Lieutenant, United States Navy
B.S., United States Naval Academy, 1967

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN AERONAUTICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL
September 1973

Library
Naval Postgraduate School
Monterey, California

ABSTRACT

The feasibility of utilizing the grip pressure exerted on a rigid control stick as a measure of tracking task difficulty was investigated. A device was engineered to measure grip pressure independent of control force. A hybrid computer was used to produce the tracking tasks necessary in the research and on-line data computation. Compensatory tracking tasks using K/s, $K/s(s+2)$ and K/s^2 controlled elements provided the difficulty levels, from easiest to most difficult.

Results indicate that grip pressure increases significantly with task difficulty as the operator attempts to reduce his effective time delay. However, grip pressure also appears to be dependent upon the "gain" which a human adopts in a particular tracking task. This gain-related grip pressure may not be related to task difficulty.

TABLE OF CONTENTS

I. INTRODUCTION ---- 7

A. BACKGROUND ---- 7

B. OBJECTIVES ---- 8

II. THEORY ---- 9

III. EXPERIMENTAL PROCEDURE ---- 14

A. EQUIPMENT ---- 14

1. Grip Pressure Measurement Device/ Rigid Control Stick ---- 14

2. Analog Computer/Digital Computer ---- 14

B. PROCEDURE ---- 16

1. Equipment Preparation ---- 16

2. Subject Testing ---- 18

a. Critical Task Runs ---- 19

b. Stable Task Runs ---- 19

3. Data Analysis ---- 20

IV. RESULTS ---- 22

V. CONCLUSIONS AND RECOMMENDATIONS ---- 25

VI. FIGURES ---- 28

VII. TABLES ---- 44

LIST OF REFERENCES ---- 46

INITIAL DISTRIBUTION LIST ---- 47

FORM DD 1473 ---- 48

LIST OF FIGURES

1. Grip Pressure as the Smaller of Two Forces ---- 28

2. Deflection Plates and Strain Gage Bridge Circuit ---- 29

3. Deflection Plate Circuit Diagram ---- 30

4. Assembled Grip Pressure Measurement Device ---- 31

5. Calibration Curve ---- 32

6. Control Stick/Grip Pressure Device/ Associated Equipment ---- 33

7. Block Diagrams of a Single-Axis Critical Task and Stable Task ---- 34

8. Typical Learning Curve ---- 35

9. Strip-Chart Recording of Grip Pressure vs Time ---- 36

10. Average Grip Pressure for Three Controlled Elements (Subject JH) ---- 37

11. Average Grip Pressure for Three Controlled Elements (Subject NH) ---- 38

12. Average Grip Pressure for Three Controlled Elements (Subject DW) ---- 39

13. RMS Error for Three Controlled Elements (Subject JH) ---- 40

14. RMS Error for Three Controlled Elements (Subject NH) ---- 41

15. RMS Error for Three Controlled Elements (Subject DW) ---- 42

16. Average Grip Pressure vs Control Stick Sensitivity ---- 43

LIST OF TABLES

I. Single-Axis Critical Tracking Task Parameters---------- 44

II. Single-Axis Stable Tracking Task Parameters ---------- 45

ACKNOWLEDGEMENT

The author wishes to thank the following technicians for their valuable assistance: Cec Gordon, Stan Johnson, Glen Middleton, John Moulton, Gordon Gulbranson, Bill Thomas, and Bob Limes. Thanks also to: Asst. Professor Ronald A. Hess, the author's thesis advisor, for his many suggestions; Lt. Donald W. Wallace for his time and effort as a test subject; and finally the author's wife Nancy who spent many hours as a test subject and many more in patient support.

I. INTRODUCTION

A. BACKGROUND

During an experimental study involving compensatory tracking tasks [Ref. 1] it was noted, but not reported, that the test subjects tended to grip the control manipulator tighter as the task difficulty increased. Smith, [Ref. 2] designed a prototype manipulator which could not only produce the electrical outputs necessary to control a system in a tracking task but could simultaneously measure operator grip pressure. Although Smith's device was hampered by poor signal-to-noise ratios in the grip pressure sensing channels, his results tended to confirm the phenomena noted in the experiments in reference 1.

The apparent relation between grip pressure or neuromuscular tension and task difficulty has been alluded to in the literature. McRuer and Jex [Ref. 3] state that the human pilot can increase the system phase margin and thus improve the stability of a system which may be difficult to control by tightening his grip on the control stick. Magdaleno and McRuer [Ref. 4] first documented the fact that increased neuromuscular tension is accompanied by a reduction in human operator "effective time delay" in tracking tasks. Such a reduction in time delay is synonymous with the increased phase margin mentioned above.

Reference 5 states that average grip pressure is a good measure of increased neuromuscular tension during tracking. Thus, it is

hypothesized here that average grip pressure may be a useful measure of tracking task difficulty, i.e., the necessity of increasing system phase margin. As such, grip pressure may be a useful tool for flight simulation work.

B. OBJECTIVES

The objectives of this research were to:

1. Engineer a grip pressure measurement device which would be highly sensitive, simple in its design and universal in its possible applications.

2. Verify the findings of reference 2 with the possibility that average grip pressure could be used as an indication of task difficulty.

II. THEORY

The problem in previous attempts to measure grip pressure independently of control force was that the device used was too insensitive. Smith [Ref. 2] used rosette strain gauges in the grip of a plexiglass control stick. Because of the problems encountered, he recommended that a more sophisticated control stick, with better amplifiers and shielding, be fabricated. Rather than using the same basic method of detection and merely upgrading the components, a new method of detection was considered here.

The vector sum of forces which a subject exerts on a control stick in a single axis control task can be thought of as the sum of two vectors; one representing the vector sum of the control force and grip force, another in the opposite direction, representing grip force alone. As shown in figure 1, the larger force is the combination of grip force and control force while the smaller force is grip force alone. This simplified representation amounts to a definition of grip force and is the basis of the grip "pressure" measurement technique to be described. Hence, the magnitude of either of the equal but opposite grip forces is defined herein as grip "pressure".

To detect the forces acting on opposite sides of a control stick, a device consisting basically of two rectangular deflection plates was engineered. At the bottom of each plate a full strain gage bridge was

mounted. These plates were attached to a four-inch isometric control stick with a ball top. Figure 2 shows the deflection plates and attached strain gages. The strain gages were SR-4, 120 ohm type, with a gain factor of approximately two. Each bridge circuit output was connected to an operational amplifier with a gain of 1000. The amplifiers were Analog Devices Inc. model 605L. Figure 3 shows the circuit diagram of the deflection plate bridge circuit, amplifier, and associated power supplies.

The deflection plates and attaching plates were machined of extruded aluminum alloy with a modulus of elasticity of approximately 10,000,000 psi. The dimensions of the deflection plates were sized such that there would be adequate strain on the strain gages to give an easily detectable signal, without excessive bending in the plates. Coupled with physical constraints to ensure a comfortable grip size, the final dimensions were those shown in figure 2. It was considered that the maximum deflection of the ends of the deflection plates should be no more than 1/32 of an inch for an applied force of 20 pounds. With this guideline and using a plate thickness of 1/8-inch and a base width of one inch, a plate length of two inches was computed. The equations used were:

$$\text{Deflection } (\delta) = PL^3/3EI$$

where:
- P = Applied force (lbs)
- L = Moment arm length (in)
- E = Modulus of elasticity (psi)
- I = Moment of inertia (in^4) = $BH^3/12$
- B = Base width (in)
- H = Thickness (in)

$$\delta = 4PL^3/EBH^3$$

$$L^3 = \delta EBH^3/4P$$

With: δ = 1/32 in
E = 10,000,000 psi
B = 1 in
H = 1/8 in
P = 20 lbs

$$L^3 = 7.63 \text{ in}^3 = (1.97 \text{ in})^3$$

$$L = 2 \text{ in}$$

With the deflection plate dimensions specified, the output voltage of the bridge circuits was predicted using the following equations:

Bending stress (σ) = Mc/I

where: M = Moment applied (lb-in) = PL
P = Force applied (lb)
L = Moment arm length to strain gages (in)
c = Half the plate thickness (in) = H/2
H = Thickness (in)
I = Moment of inertia (in^4) = $BH^3/12$
B = Base width (in)

Strain (ϵ) = σ/E

where: σ = Bending stress (psi)
E = Modulus of Elasticity (psi)

ϵ = Mc/IE = $6PL/EBH^2$ (after some substitution)

Voltage output of full bridge with four active strain gages is given by:

Vo = ϵVsFG

where: ϵ = Strain (in/in)
Vs = Bridge supply voltage
F = Strain gage factor
G = Amplifier gain

$$Vo = 6PLVsFG/EBH^2$$

For deflection plate dimensions:

B = 1 in
L = 2 in
H = 1/8 in

And other constants:

E = 10,000,000 psi
Vs = 4 volts
F = 2
G = 1000
P = 1 lb

Vo = .6144 volts/lb

With these predicted values of deflection and output voltage, the grip pressure measuring device was assembled and calibrated. The assembled device is shown in figure 4 with grip handles attached to the deflection plates. The grip handles were machined out of a strong epoxy material. For calibration, the device was clamped to a table in a horizontal position. The amplifiers were zeroed to within plus or minus two millivolts and then the bridge circuits were balanced to a point where only 0.2 millivolts of noise remained. This was done prior to placing the stick in the horizontal. A basket was fashioned and hung on the grip such that the moment arm with respect to the strain gages was approximately two inches. Weights were gradually added to the basket and output voltage was recorded. Up to five pounds of weight were added and then gradually removed to check for any hysteresis effects. The device was turned over and the other plate was calibrated in the same manner. Figure 5 shows the calibration

curve produced. Both deflection plates were nearly identical in their outputs and showed no hysteresis effects. The offset at the zero force position was due to the device's own cantilever weight which produced the slight deflection noted. The outputs of the plates were completely independent. The calibration agreed very closely with predicted output values. In particular, at a force of 2.2 pounds the output was approximately 1.34 volts (considering the 60 millivolt offset at zero force), compared to a predicted value of 1.35 volts (0.6144 volts/lb times 2.2 lbs). Thus, there was a difference of 0.75%.

Although the dimensions of this device were basically restricted so that it could be used on a particular control stick, almost any shape could be fabricated for different applications. The device described here proved to be highly sensitive, linear, and able to detect and differentiate the fore and aft forces necessary in computing grip pressure as described earlier.

III. EXPERIMENTAL PROCEDURE

A. EQUIPMENT

The equipment used in the experiment consisted of:

1. Grip pressure measurement device mounted on a rigid control stick and associated equipment.
2. Analog Computer
3. Digital Computer

1. Grip Pressure Measurement Device/Rigid Control Stick

The grip pressure measurement device described earlier was mounted on an isometric or rigid force stick about four inches long, and the whole assembly was mounted on a chair. [Figure 6] Associated equipment consisted of two signal generators, two low-pass filters, a dual-axis cathode-ray tube (CRT) and an eight pen strip-chart recorder. One of the signal generators powered the rigid control stick, and the other provided a steady horizontal line on the CRT display. The low pass filters were used for the input to the vertical and horizontal plates of the display to remove high frequency noise originating in the analog computer. The strip-chart recorder provided time histories of the grip pressure during tracking runs.

2. Analog Computer/Digital Computer

Central to the entire experiment was the CI5000 Analog Computer, which generated the tracking tasks and the SDS9300 Digital

Computer which controlled the operation of the analog computer and provided on-line data reduction. Thanks to previous research by Lieutenant Walter Michael Teichgraber [Ref. 6], a general analog patchboard and associated computer program were available that completely mechanized the tracking tasks and provided on-line data reduction. The computer program was modified to include statements for computing grip pressure at any particular instant and a subroutine to determine the average grip pressure over the length of a tracking run. As mentioned previously, the output from the grip pressure device was a voltage signal from each deflection plate, the smaller of the two signals being the grip pressure (force) exerted. This comparison of signals was done using the hybrid facilities of the analog and digital computers. By using the trunk lines coupling the computers, analog signals from the deflection plates were converted into digital signals, sampled 60 times a second, and compared in the computer program using a group of "IF" statements; the smaller signal being labeled the grip pressure. This grip pressure was integrated in the digital computer over the length of the subcritical task runs to compute "average grip pressure." The digital grip pressure signal was also converted back into an analog signal for recording on the strip-chart recorder.

For a thorough description of the hybrid operations used, the computer program used, and the operating instructions for Lt. Teichgraber's hybrid set-up, see reference 6.

B. PROCEDURE

1. Equipment Preparation

All the equipment described earlier was located in Room 500 of Spanagel Hall at the U. S. Naval Postgraduate School. Prior to a test subject's arrival, all equipment was readied according to the instructions in reference 6. In general the following steps were taken in chronological order:

a. Analog patchboards (#19) were installed in the analog computer. Connections were made between the analog patchboard and the filters, signal generators and the CRT display unit. The analog computer was turned on and placed in a mode for digital computer control. The strip chart recorder was turned on.

b. The digital computer was readied according to its own instructions manual. The necessary data card was punched [Ref. 6, p. 79-80], and then the hybrid program deck was read into the computer for compilation and execution. The timing switch for the digital computer was checked to ensure that it was in the "internal mode."

c. As the program was being compiled in the computer, the desk and control stick assembly were placed in front of the CRT display unit. The desk was placed in such a way that a nominal 20-inch eye-to-display distance was maintained for standardization with prior research. The grip pressure measurement device output leads were inserted into the analog computer patchboard for hybrid utilization as mentioned

previously. The output leads consisted of the two active deflection plate leads and a common ground lead. To stabilize the grip pressure signals the active leads were inserted into the input jacks of operational amplifiers prior to connection with the trunk lines of the computer. The power supply for the grip pressure measurement device was plugged in and turned on so that the bridge circuits could warm up properly prior to taking grip pressure readings.

d. After the program was compiled and data card read, the appropriate codes were entered in the digital computer for the type of tracking task desired. The control stick was then calibrated according to the instructions of reference 6, p. 80-82. The control sensitivity was kept at 1.75 in/lb for the K/s controlled element and 5.83 in/sec/lb for the $K/s(s+2)$ and K/s^2 controlled elements. These control sensitivities are equivalent to the 1.0 cm/Newton and 3.33 cm/sec/Newton sensitivities used in prior research with cross adaptive tracking experiments conducted in reference 7. These sensitivities represent the amount of deflection of the horizontal line on the CRT screen per unit of force on the control stick with a controlled element of unity. The calibration completed, the computer asked for the number of runs desired. The parameters KRUN and LRUN were entered depending on what number was desired to indicate the upcoming run and how many runs of the particular tracking task were desired respectively.

e. Finally, the amplifiers and bridge circuits of the grip pressure measurement device were zero balanced to within plus or minus one millivolt. With this completed, all systems were ready for subject testing.

2. Subject Testing

Three subjects were used in this research: the author; the author's wife and a naval aviator. The author (Subject JH) had no previous tracking experience, but was a naval flight officer and private pilot. The author's wife (Subject NH) had no tracking experience and no aviation experience. Subject (DW) had no prior tracking experience, but was an experienced Navy pilot.

All subjects other than the author were briefed on the experiment using a short written set of instructions. Each subject completed a series of compensatory tracking tasks with three so-called "critical" controlled elements and three stable controlled elements (see Tables I and II and Fig. 7). The display area for tracking was a four inch square on the CRT display unit and a bright green horizontal line approximately 1/16 of an inch wide was displayed on the CRT. Subjects started with the first order critical controlled element, then tracked with the K/s stable element. Next, the "1.5" order critical controlled element followed by the K/s(s+2) was used. Finally, the second order critical element was utilized, followed by the K/s^2 element. For each critical task, runs were repeated until it was

felt that the subject's critical instability level (λ Crit) was reached. Runs with the K/s, K/s(s+2), and K/s^2 dynamics were continued until the subjects learning curve (RMS tracking error versus run number) leveled out. See figure 8 for a typical learning curve example. Grip pressures were measured and recorded after significant learning was complete.

a. Critical Task Runs

The reader is referred to reference 5 for information on the critical tracking tasks. These tasks were included in this study to verify the results of reference 2 in attempting to determine intra-run variation in grip pressure with task difficulty.

The initial value of the instability level was set at 1.0 rad/sec. The digital computer increased the instability level at a constant rate of 0.1 rad/sec^2 until the critical instability level was reached, where the subject could no longer keep the horizontal line within the four inch square on the CRT. The analog computer circuits for first, "1.5" and second order critical tasks are shown in reference 6 on pages 48, 49 and 50 respectively.

b. Stable Task Runs

The analog computer circuits used for the K/s, K/s(s+2) and K/s^2 controlled elements are shown in reference 6 on pages 57, 58 and 59 respectively, with the exception that the noise generator circuit was not used. The input presented to the subject was the sum of five

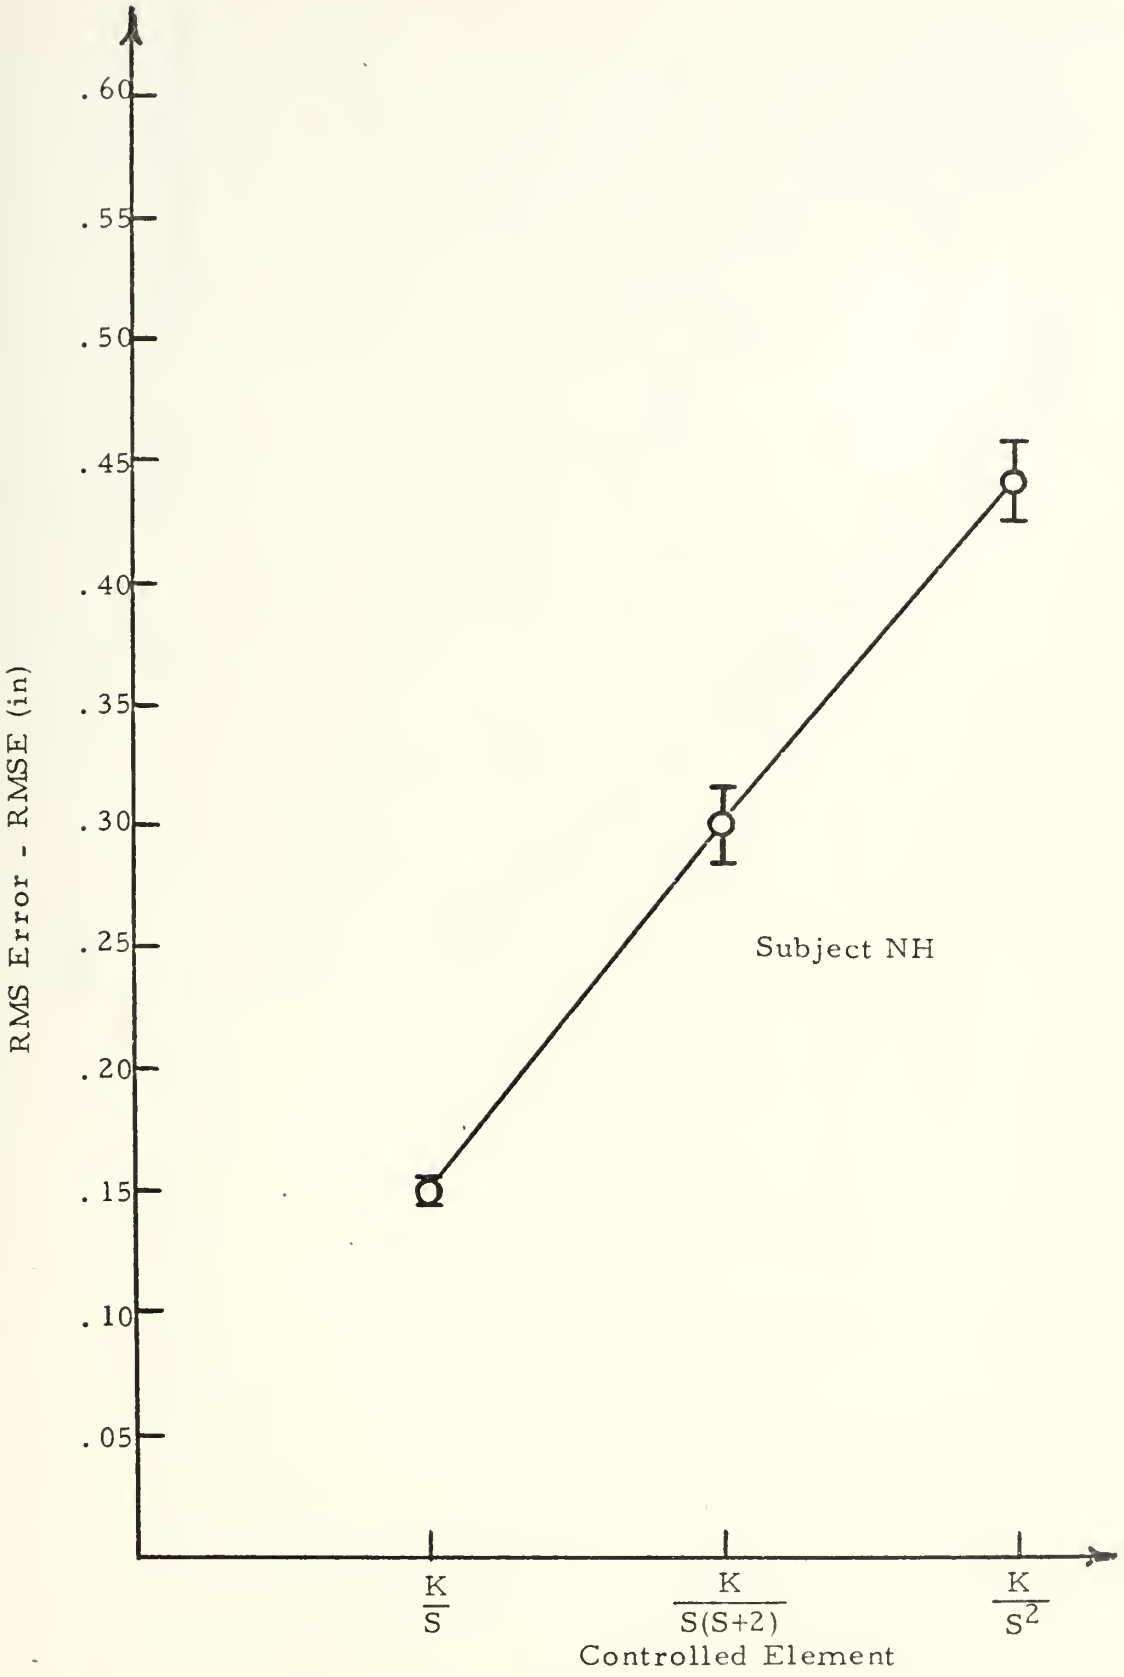

Figure 14. RMS Error for Three Controlled Elements

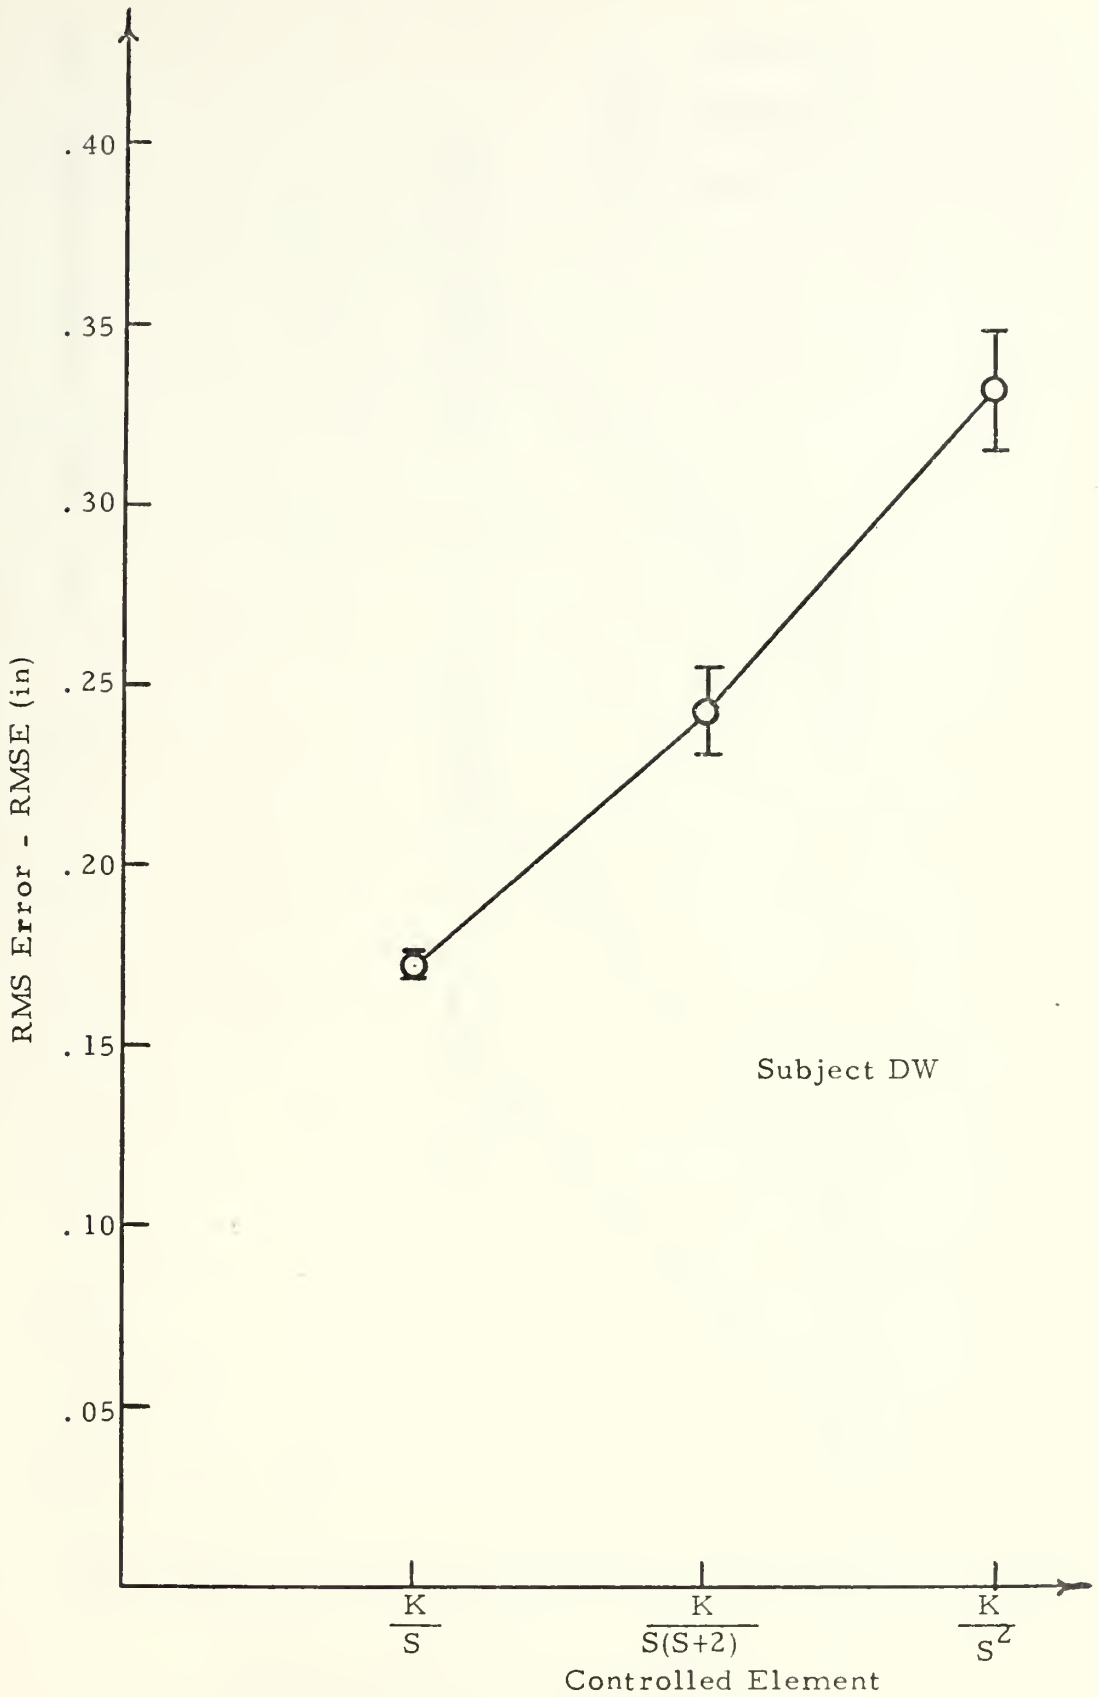

Figure 15. RMS Error for Three Controlled Elements

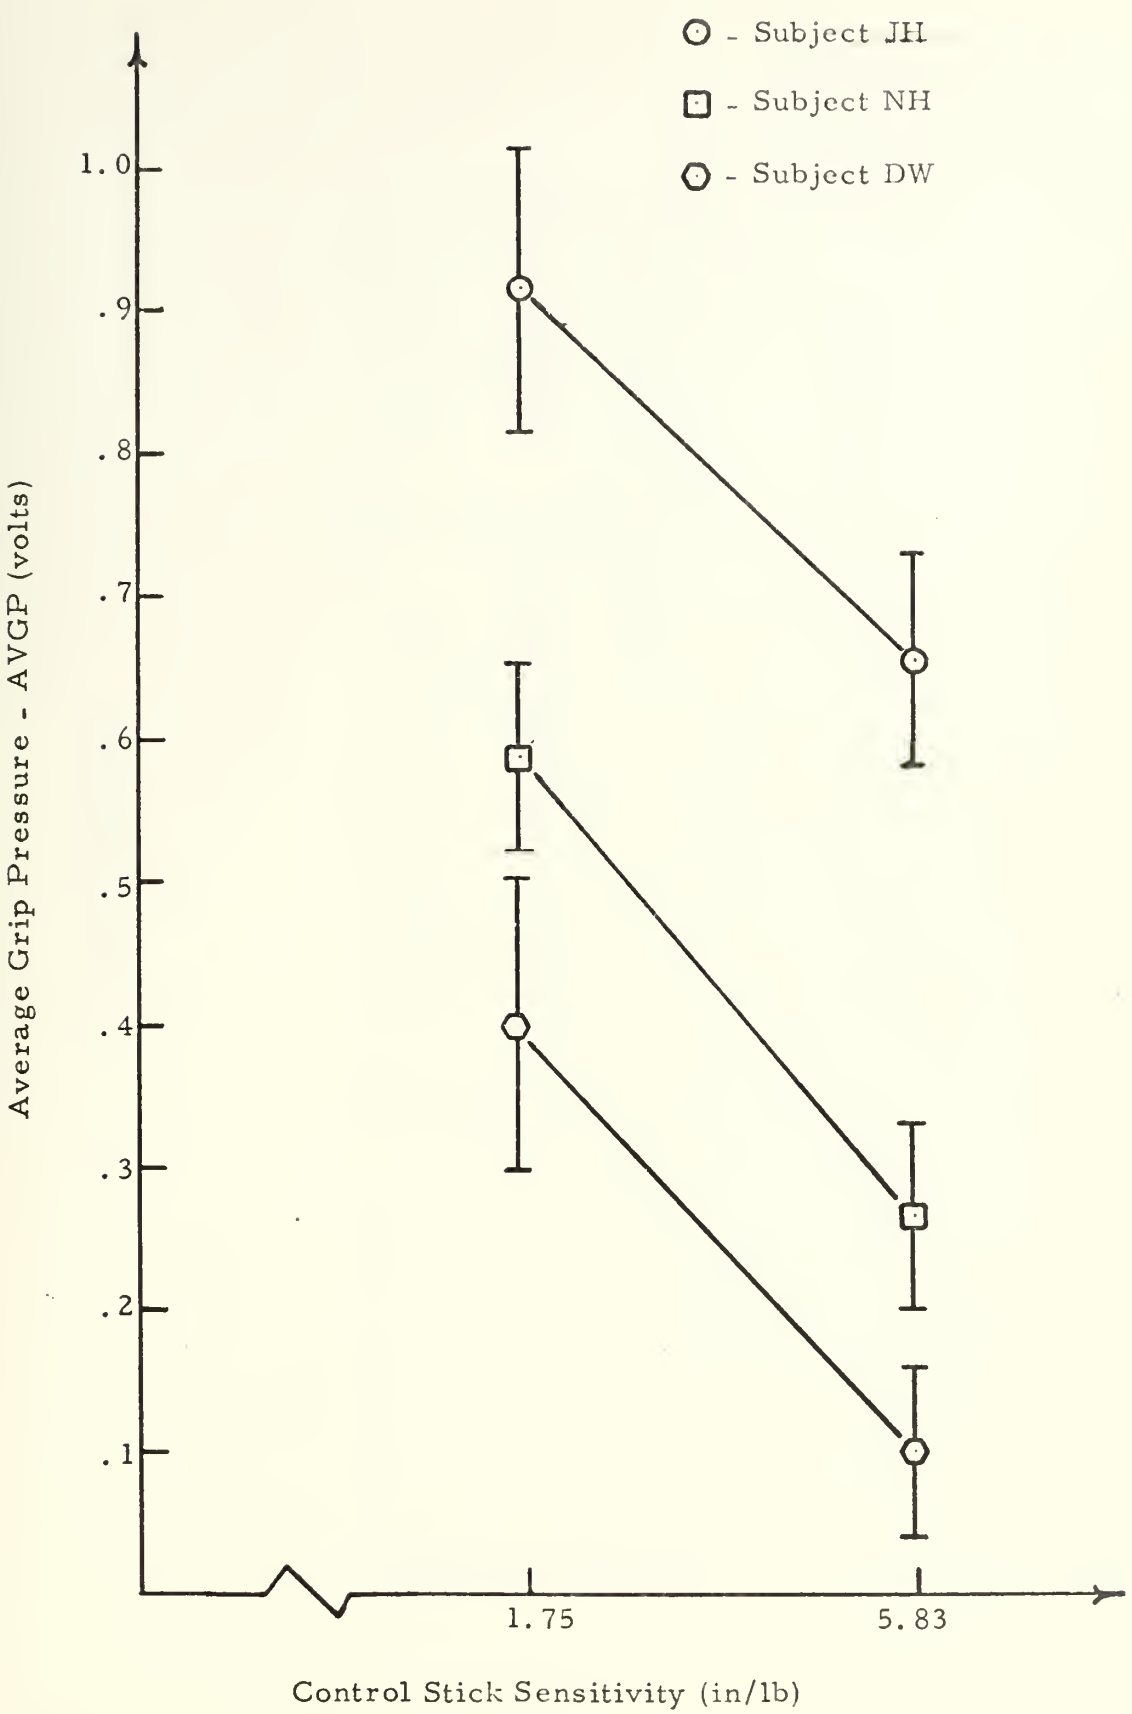

Figure 16. Average Grip Pressure vs Control Stick Sensitivity

VII. TABLES

	1st order	"1.5" order	2nd order
Y_c = Controlled element	$\frac{K\lambda}{S-\lambda}$	$\frac{K\lambda}{(S+2)(S-\lambda)}$	$\frac{K\lambda}{S(S-\lambda)}$
K = Control sensitivity	1.75 in/lb	5.83 in/sec/lb	5.83 in/sec/lb

Table I. Single-Axis Critical Tracking Task Parameters

Y_c = Controlled element	$\frac{K}{S}$	$\frac{K}{S(S+2)}$	$\frac{K}{S^2}$
K = Control sensitivity	1.75 in/lb & 5.83 in/lb	5.83 in/sec/lb	5.83 in/sec/lb
Input	.39 [.494 sin .502t + .460 sin 1.256t+ .204 sin 3.015t + .0543 sin 6.282t + .0306 sin 10.46t] (in)		
Input RMS value	.39 (in)		

Table II. Single-Axis Stable Tracking Task Parameters

LIST OF REFERENCES

1. Hess, Ronald A., The Use of a Nonadjectival, Nonordinal, Linear Rating Scale in a Single Axis Compensatory Tracking Task, NPS-57He7191A, Naval Postgraduate School, September 1971.

2. Smith, William Steele, Effects of Neuromuscular Tension in the Use of an Isometric Hand Controller, AeE Thesis, Naval Postgraduate School, December 1972.

3. McRuer, D. T. and Jex, H. R., A Review of Quasi-Linear Pilot Models, IEEE Transactions on Human Factors in Electronics, Vol. HFE 8, No. 3, September 1967, pp. 231-249.

4. Magdaleno, R. E. and McRuer, D. T., Experimental Validation and Analytical Elaboration for Models of the Pilot's Neuromuscular Subsystem in Tracking Tasks, NASA CR-1757, April 1971.

5. Jex, H. R. and Allen, R. W., Research on a New Human Dynamic Response Test Battery, Proceedings of the Sixth Annual Conference on Manual Control, April 1970, pp. 743-778.

6. Teichgraber, Walter Michael, The Effects of Signal Quantization on Compensatory Tracking Performance, AeE Thesis, Naval Postgraduate School, December 1972.

7. Hess, Ronald A. and Teichgraber, Walter M., Error Quantization Effects in Compensatory Tracking Tasks, Submitted for publication to IEEE Transactions on Systems, Man and Cybernetics.

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Documentation Center Cameron Station Alexandria, Virginia 22314	2
2.	Library, Code 0212 Naval Postgraduate School Monterey, California 93940	2
3.	Asst. Professor Ronald A. Hess, Code 57He Department of Aeronautics Naval Postgraduate School Monterey, California 93940	1
4.	Chairman, Department of Aeronautics Naval Postgraduate School Monterey, California 93940	1
5.	LT John H. Hickok, USN 145 Moreell Circle Monterey, California 93940	1

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Grip Pressure as a Measure of Task Difficulty in Compensatory Tracking Tasks		5. TYPE OF REPORT & PERIOD COVERED September 1973 6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) John Howard Hickok		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		12. REPORT DATE September 1973 13. NUMBER OF PAGES 49
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Naval Postgraduate School Monterey, California 93940		15. SECURITY CLASS. (of this report) Unclassified 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The feasibility of utilizing the grip pressure exerted on a rigid control stick as a measure of tracking task difficulty was investigated. A device was engineered to measure grip pressure independent of control force. A hybrid computer was used to produce the tracking tasks necessary in the research and on-line data computation. Compensatory tracking tasks using K/s, $K/s(s+2)$ and K/s^2 controlled elements provided the difficulty levels, from easiest to most difficult.

20.
Results indicate that grip pressure increases significantly with task difficulty as the operator attempts to reduce his effective time delay. However, grip pressure also appears to be dependent upon the "gain" which a human adopts in a particular tracking task. This gain-related grip pressure may not be related to task difficulty.

Thesis
H5267 Hickok 146632
c.1
Grip pressure as a measure of task difficulty in compensatory tracking tasks.

Thesis
H5267 Hickok
c.1
Grip pressure as a measure of task difficulty in compensatory tracking tasks.

thesH5267
Grip pressure as a measure of task diffi
3 2768 002 05960 2
DUDLEY KNOX LIBRARY